GAMMA 30

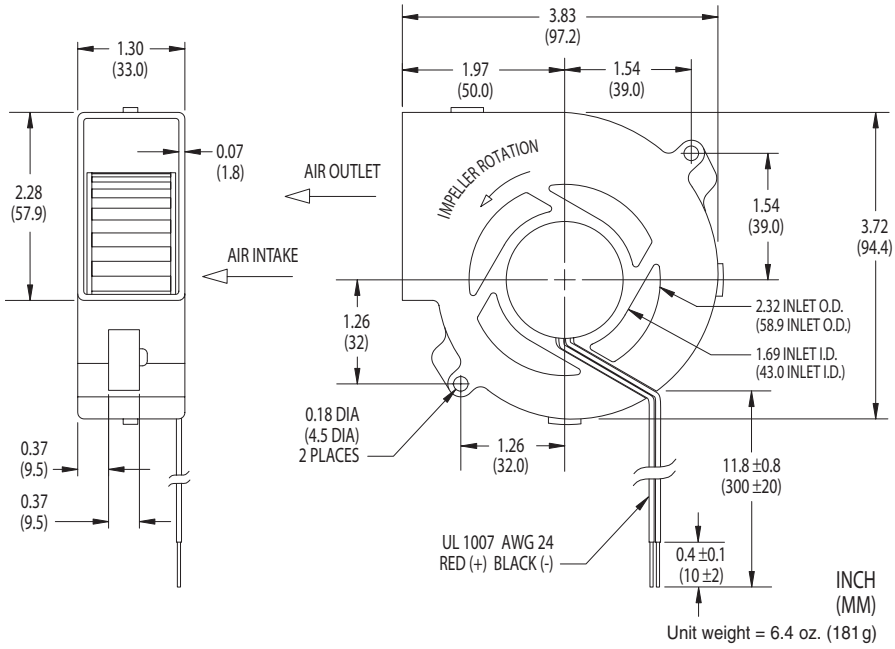

Unit weight = 6.4 oz. (181 g)

- 17 to 25 CFM Air Flow Ratings
- Polarity Protected
- UL, CUL, TÜV Safety Approvals
- Frame and Impeller Rated UL94V-0
- Permanently Lubricated Ball Bearings
- Alarm/Tachometer/Thermal Speed Control Options Available
- Color-Coded 11.8 in. (300 mm) Leads

Electrical and Mechanical Characteristics

		Operating Voltage				*Sound Level*				*Operating Temp.*		L10
Model	Air Flow (CFM)	Nom. (V)	Range (V)	Current (mA)	Power (W)	Pressure (dBA)	NPEL (Bels)	Fan Speed (rpm)	Bearing	Min. (°C)	Max. (°C)	Life† (hours)
A34122	17	12	10.2-13.8	370	4.40	46.2	5.4	2,700	Ball	-10	+70	110,000
A34146*	17	24	20.4-27.6	150	3.60	46.2	5.4	2,700	Ball	-10	+70	110,000
A34123	22	12	10.2-13.8	460	5.52	53.4	5.7	3,200	Ball	-10	+70	104,500
A34147*	22	24	20.4-27.6	250	6.00	53.4	5.7	3,200	Ball	-10	+70	104,500
A34124	25	12	10.2-13.8	650	7.80	57.4	6.0	3,800	Ball	-10	+50	94,500
A34148*	25	24	20.4-27.6	300	7.20	57.4	6.0	3,800	Ball	-10	+50	94,500

Note: Air flow, current, power, speed and sound level ratings are at nominal voltage against zero static pressure. NPEL = Noise Power Emission Level. Power termination and signal options are designated by two-digit suffixes added to the model names. For color-coded 300mm power leads, add "16" to the model numbers.

† L10 bearing life expectancy at T_A = +40°C, nominal voltage. Failure criteria include a 15% reduction in speed or a 5 dBA increase in sound pressure.

* Safety agency approvals pending.

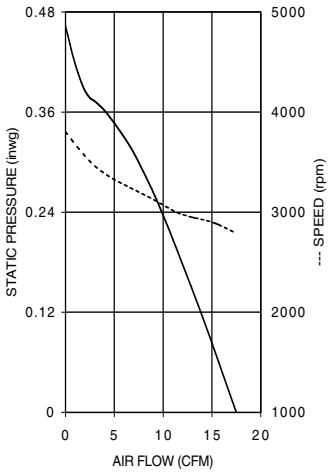

A34122/A34146

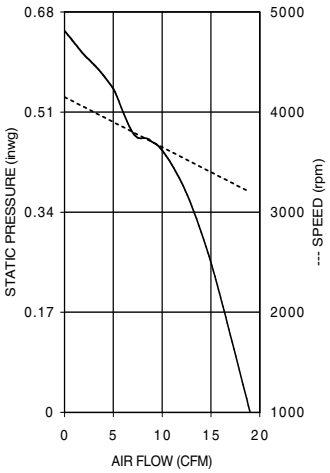

A34123/A34147

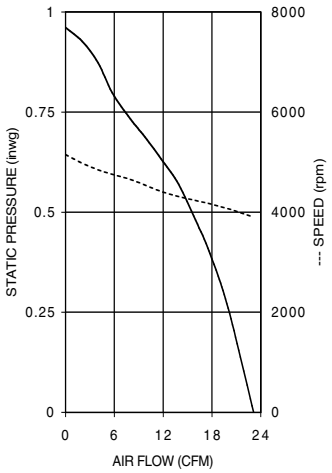

A34124/A34148

Nidec

152 Will Drive, Canton, MA USA 02021 · Phone 781-828-6216 · Fax 781-830-1155
Email fans@nidec.com · http://www.nidec.com